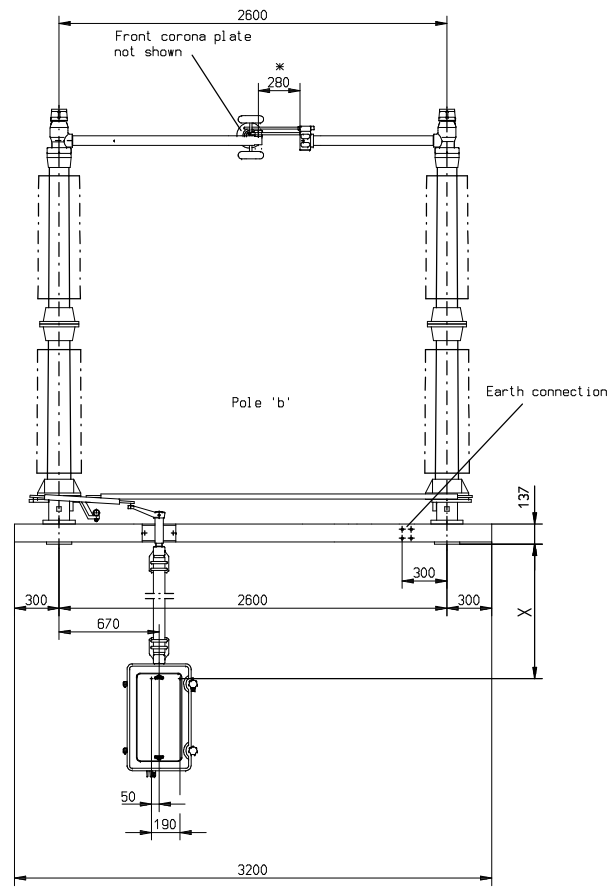
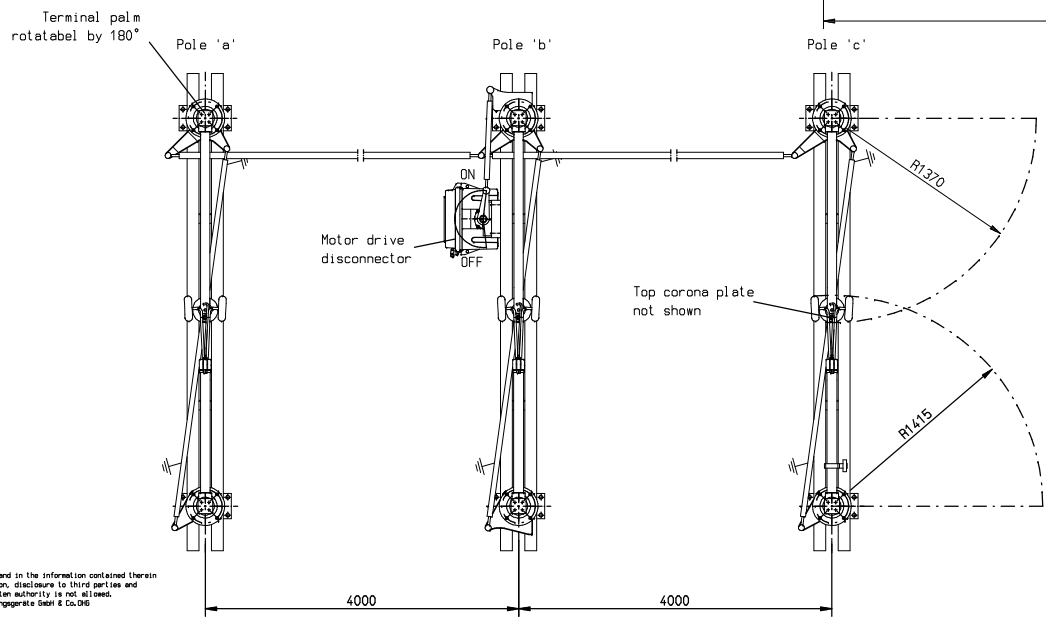
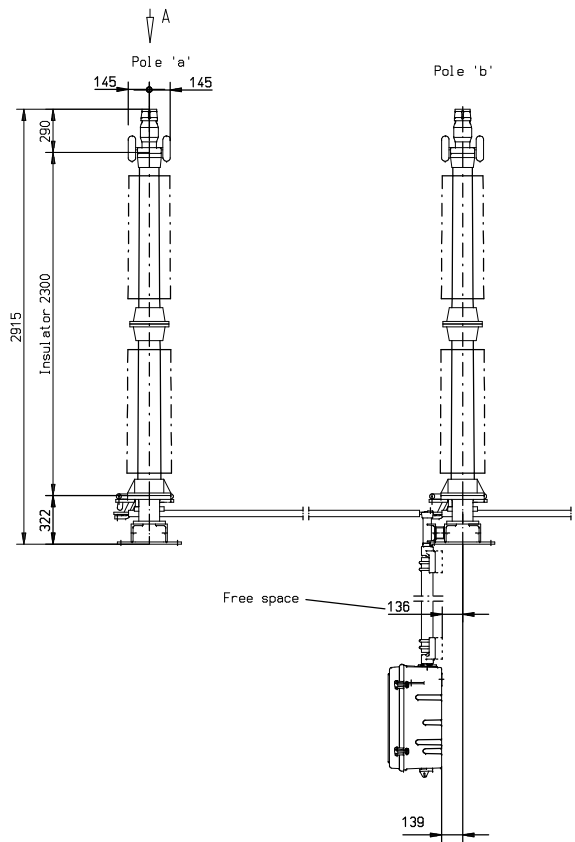


Rated voltage:	245 kV
Rated normal current:	1250 A
Rated lightning impulse withstand voltage:	
common value:	1050 kV
across isolating dist.:	1200 kV
Rated short time withstand current:	40 kA - 1 s
Rated mechanical terminal load static:	1500 N
static and dynamic:	4500 N
Disconnector:	
Motor drive:	MA-6
Masses:	
Disconnector / pole:	550 kg
Motor drive:	50 kg

All rights in this document and in the information contained therein are reserved. The reproduction, disclosure to third parties and use without expressive, written authority is not allowed.
Copyright: RUHRTAL Hochspannungsgeräte GmbH & Co. OHG

Subject to change without notice.

Origin: 32-4630

RUHRTAL Hochspannungsgeräte GmbH & Co. OHG		General tolerances: ISO 2768-c	
1:25	Drawn 05.07.2005 Checked 27.07.2005	Schraede Schwarz	Replaces:
Centre break disconnector D BF2-245			Replaced by:
			Dwg. No.: 32-4661